

# Specification

## SelfCookingCenter® SCC 102 E (10 x 2/1 - 20 x 1/1 GN)

Reference number: SCC5S102E



### iCookingControl® - 7 operating modes



#### Function - Automatic-Mode

iCookingControl with the 7 applications for meat, poultry, fish, side dishes, egg dishes & baked goods. Finishing, to easily enter the desired result with automatic adjustment of the ideal cooking path.

#### Combi-Steamer mode



Steam between 30 °C and 130 °C



Hot-air from 30 °C-300 °C



Combination of steam and hot-air  
30 °C-300 °C

#### HiDensityControl®



Patented distribution of the energy in the cooking cabinet

#### iLevelControl ILC



Mixed loads with individual monitoring of every rack depending on the type and quantity of the load as well as the number of door openings.

#### Efficient CareControl



Efficient CareControl recognises soiling and scale and removes it automatically.

#### Description

- Cooking appliance for automatically cooking (Automatic mode) meat, poultry, fish, side dishes/vegetables, egg dishes/desserts, bakery products and for automatic finishing®. With an intelligent system for optimising mixed loads in production and in à la carte service as well as a fully automatic cleaning and care system.
- Hot-air steamer (combi-steamer mode) conforming to DIN 18866 for most of the cooking methods used in commercial kitchens for the optional use of steam and hot-air, individually, in succession or in combination.

#### Working safety

- Detergent and Care tabs (solid detergents) for optimum working safety
- HACCP data output and software update via the integrated Ethernet and USB port
- Safety temperature limiter for steam generator and hot-air heating
- VDE approved for unsupervised operation
- Maximum rack height 1.60 m for use on an original base cabinet
- Integral fan impeller brake
- Door handle with right/left and slam function

#### Operation

- Remote control function for appliance using software and mobile app
- iCC-Cockpit – graphically supported overview of the current cooking chamber climate, the expected progress of the cooking process, review and forecast as well as options at the end of cooking
- iCC Messenger – informs on current and automatic adjustments to the cooking process
- iCC Monitor – Overview of all automatic adjustments to the cooking process
- 9 self-configurable, user-specific operating display (images, text, etc.)
- Record mode – Determination of the ideal cooking path for calibrated products using the core temperature probe for subsequent use without a core temperature probe, with automatic consideration of load quantity
- Self-learning operation, automatically adapts to actual usage
- 8.5" TFT color monitor and touch screen with self-explanatory symbols for ease of operation
- Control second unit from the main unit (units must be connected via ethernet or network)
- Application and user manuals can be called up on the unit display for the current actions

#### Cleaning, care and operational safety

- Automatic cleaning and care system for cooking cabinet and steam generator works regardless of the water pressure supplied
- 7 cleaning stages for unsupervised cleaning and care - even overnight
- Automatic cleaning and descaling of the steam generator
- Automatic cleaning prompts indicating the cleaning stage and volume of chemicals in relation to the level of soiling
- Soiling and care status are displayed on the monitor
- Diagnostic system with automatic service notices displayed
- Self-Test function for actively checking unit's functions

#### Features

- Rear-ventilated triple-glazed cooking cabinet door, two hinged inside panes (for easy cleaning) with a special heat-reflecting coating
- LED cooking cabinet and rack lighting - energy-saving, durable and low-maintenance
- Optical rack signalling function
- Core temperature probe using 6 measuring points with automatic error correction. Positioning aid for core temperature probe included
- Climate management - humidity measured, set and regulated to one percent accuracy. Actual humidity in the cooking cabinet can be set and read on the control panel in Combi-Steamer modes
- Individual Programming of at least 1200 cooking programs with up to 12 steps
- Humidification variable in 3 stages from 86° F-500° F (30° C-260° C) in hot air or combination
- Integrated Ethernet socket to connect to a cloud based system for administration of cooking processes, management of HACCP and service data and remote control
- High-performance, fresh-steam generator with automatic descaling
- Dynamic air circulation in cooking cabinet with reversing wheel fan with 5 fan speeds, programmable
- Integral, maintenance-free grease extraction system with no additional grease filter
- Operation without a water softener and without additional descaling
- Separate solenoid valves for normal and soft water
- Cool-down function for fast cabinet fan cooling
- Automatic adaptation to the installation location (height, climate, etc.)
- Removable, swivelling hinging racks (distance between rails 2 5/8" / 68 mm)
- Material inside and out 304 (DIN 1.4301) stainless steel
- Hand shower with automatic retracting system
- Fixed waste water connection conforming to SVGW requirements were permitted
- Demand-related energy supply
- Lengthwise loading for 18"x26" or 2/1, 1/1 GN accessories
- 5 programmable proofing stages
- Automatic, pre-selected starting time with adjustable date and time
- Uses the LED lighting to signal the end of the preheating phase or the process

#### Approval/Labels





# Specification/Data sheet

Fri Apr 13 21:14:27 CEST 2018

## SelfCookingCenter® SCC 102 E (10 x 2/1 - 20 x 1/1 GN)

### Technical Info

|  |                           |  |  |                                  |                                  |                          |
|--|---------------------------|--|--|----------------------------------|----------------------------------|--------------------------|
| <b>Lengthwise loading for:</b>         | 2/1, 1/1 GN               | <b>Weight (gross):</b>                   | 218 kg                                   | <b>Connected load electric :</b> | 39,9 kW                          |                          |
| <b>Capacity (GN-container/ grids):</b> | 10 x 2/1 GN / 20 x 1/1 GN | <b>Water connection (pressure hose):</b> | 3/4" / d 1/2"                            | <b>"Steam" connection:</b>       | 36 kW                            |                          |
| <b>Number of meals per day:</b>        | 150-300                   | <b>Water pressure (flow pressure):</b>   | 150-600 kPa / 0,15-0,6 Mpa / 1,5 - 6 bar | <b>"Hot-air" connection:</b>     | 36 kW                            |                          |
| <b>Width:</b>                          | 1.069 mm                  | <b>Water drain:</b>                      | DN 50 mm                                 | <b>Mains connection</b>          | <b>Breaker Size / (amp draw)</b> | <b>Cable crossection</b> |
| <b>Depth:</b>                          | 976 mm                    | <b>Data interface:</b>                   | Splashwater proof LAN socket RJ45        | 3 NAC 415V                       | 3x60A                            |                          |
| <b>Height:</b>                         | 1.042 mm                  |  |  | 50/60Hz                          |                                  |                          |
| <b>Weight (net):</b>                   | 185 kg                    |  |  | Other voltage on request!        |                                  |                          |

### Installation

- Recommended left hand clearance for service and maintenance 20" / 500 mm. It must be a minimum of 14" / 350 mm if heat sources are affecting the left side of the unit
- Installations must comply with all local electrical, plumbing and ventilation codes. The local standards and regulations for ventilation systems must be adhered to.
- For proper usage of ConnectedCooking a network socket according to RJ45 has to be provided. For optimal performance a cable-bound connection with a data rate of at least 10 Mb/s is the preferred connection. Alternatively W-LAN connections with appropriate W-LAN adaptors can be used.

### Options

- Marine version
- Security version/prison version
- Left hinged door
- Integrated fat drain
- Potential free contact for operation indication included
- Safety door lock
- Sous-Vide core temperature probe
- Externally attached core temperature probe
- 3 externally attached core temperature probes for iLevelControl applications
- Mobile oven rack package
- Lockable control panel
- Connection to energy optimising systems + Potential free contact for operation indication included
- Special voltages
- external signal unit connection
- Control panel protection

### Accessories


- GN Containers, Trays, Grids
- Stands / Cabinets
- Stand I / Cabinets IV
- Thermocover
- Transport trolley for mobile oven rack and mobile plate rack
- Exhaust hood
- UltraVent Plus condensation hood with special filter technology
- UltraVent condensation hood
- Superspike (poultry grids), CombiGrill®/Griddle grid
- Heat shield for left hand side panel
- Special Cleaner tablets and care tabs
- Grease drip container
- Mobile plate rack
- Signal lamp
- Catering kit

RATIONAL AUSTRALIA PTY LTD  
Subsidiary of Comcater Pty Ltd

We reserve the right to make technical improvements

156 Swann Drive, Derrimut, VIC 3030  
Phone: 03 8369 4600 Fax: 03 8369 4699  
Email: sales@rationalaustralia.com.au  
Web: www.rationalaustralia.com.au

## SelfCookingCenter® SCC 102 E (10 x 2/1 - 20 x 1/1 GN)

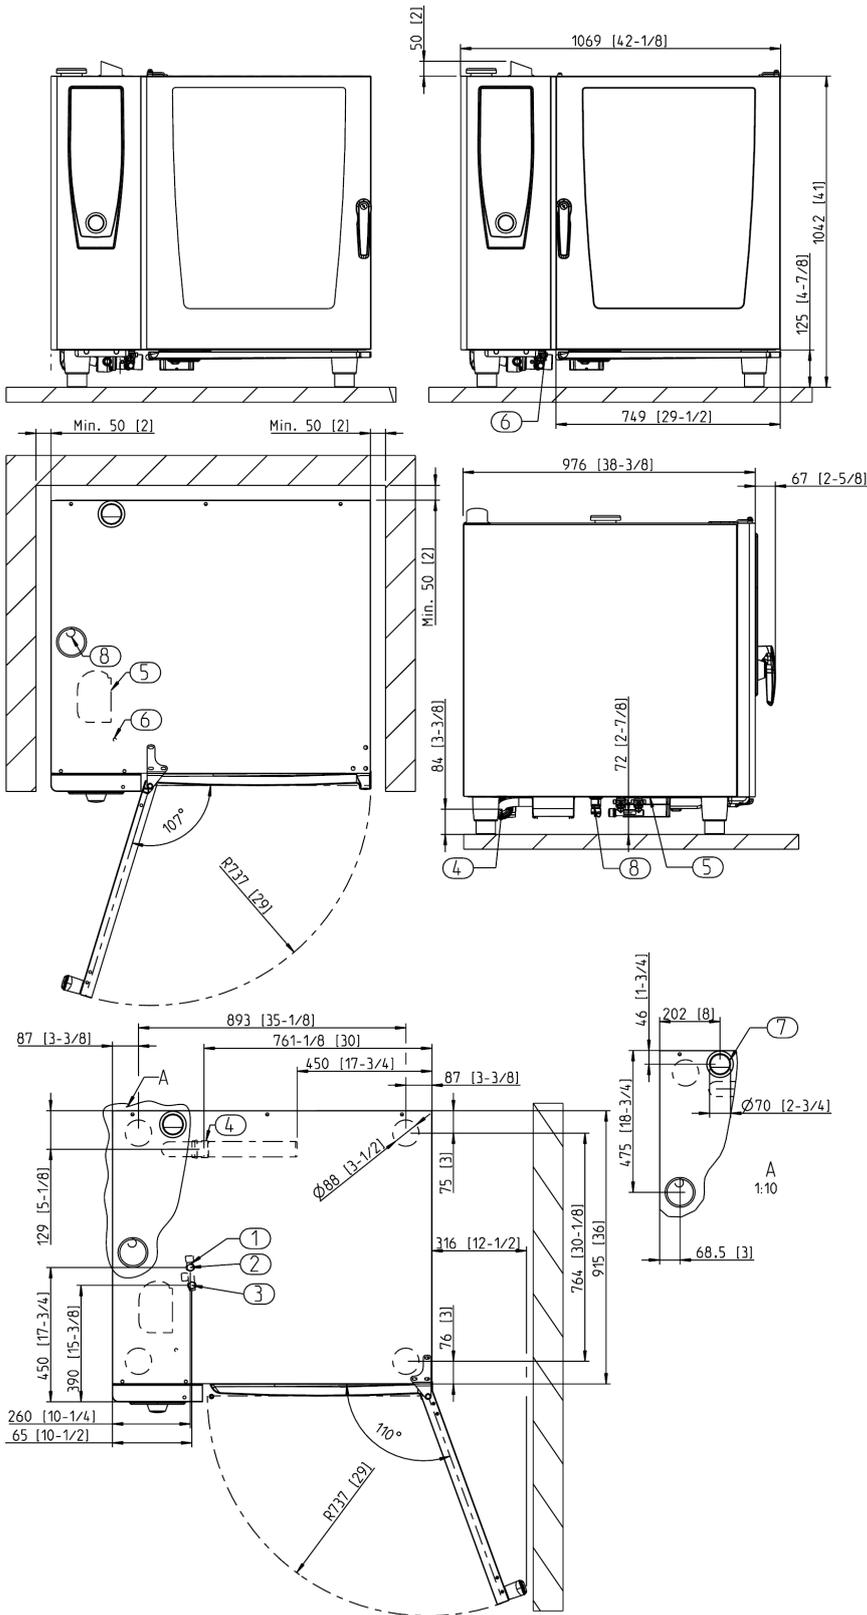

1. Common water supply (cold water) "Single" water connection as shipped
  2. Water supply cold water / condensate "Split" water connection
  3. Water supply cold / Treated "Split" water connection
  4. Water drain
  5. Electrical connection wire entrance
  6. Chassis Ground connection
  7. Steam Vent pipe DN 2 3/4" / 70 mm
8. Splashwater-proof Ethernet socket RJ45; minimum distance 2" / 50 mm Left side clearance 20" recommended for servicing of unit without the ability to move unit while connected. Measurements in mm (inch)