High Speed Oven HUR-18

4125000001 SPEED OVEN HUR-18 230/50/I · 4125000002 SPEED OVEN HUR-18 230/60/I

TECHNICAL DATA	
External Dimensions (mm)	450x647x660
Ext. Dim. Without superior rod (mm)	450x647x612
Chamber size (mm)	317x315x188
Capacity (ltr.)	18
Net Weight (kg)	61
Voltage (V)	208-240
Power (kW)	3.5
Microwave Power (kW)	1.5
Impingement Power (kW)	3
Fan Speed	10-100%
Microwave Range	0-100%
Recipes	100
Stages	10
IPX Grade	IPX3
Maximum Temperarture (ºC)	280



CHARACTERISTICS

- **Hot Air Impingement**
  Thanks to the vertical hot air impingement and to convection, food heats up rapidly and evenly, resulting in crispy, flavorful products with an attractive color.
- **Combination of Microwave and Air Impingement**
  With the combination of the microwave and the hot air impingement, it is capable of baking food in more ways.
- **High Speed Baking**
  With high efficiency magnetrons in the upper part, food bakes at a high speed without a significant loss in humidity due to the impact of hot air impingement.
- **Food Defrost**
  The microwaves defrost food at a high speed without losing moisture.
- **Removable Food Support and Rack**
  Facilitates interior cleaning and removable component maintenance.

CONTROL PANEL



- 7” Touchscreen.
- Predefined menú and manually adjustable modes.
- 100 recipes and 10 baking stages.
- Time Adjustment: 0-20 min.
- Automatic door detection.
- User-friendly operation.
- Adjustable hot air impingement from 10% to 100% in 10% increments.
- Software or recipes updates via USB.
- Autodiagnostic function.

IDEAL FOR…



Fast preparation of snacks, appetizers, and a wide variety of dishes all cooked to be crispy, juicy, and full of flavor.


CHAMBER AND ISOLATION



Robust and easy to clean construction made of AISI 304 stainless Steel. High quality insulation maintains the oven’s exterior below 55ºC.

SALVA INDUSTRIAL S.L.U.
GI-636 Km. 6 Polígono 107
E-20100 Lezo, Guipúzcoa
Tel: (+34) 943 449300


e-mail España: salva@salva.es
e-mail Export: sales@salva.es
www.salva.es

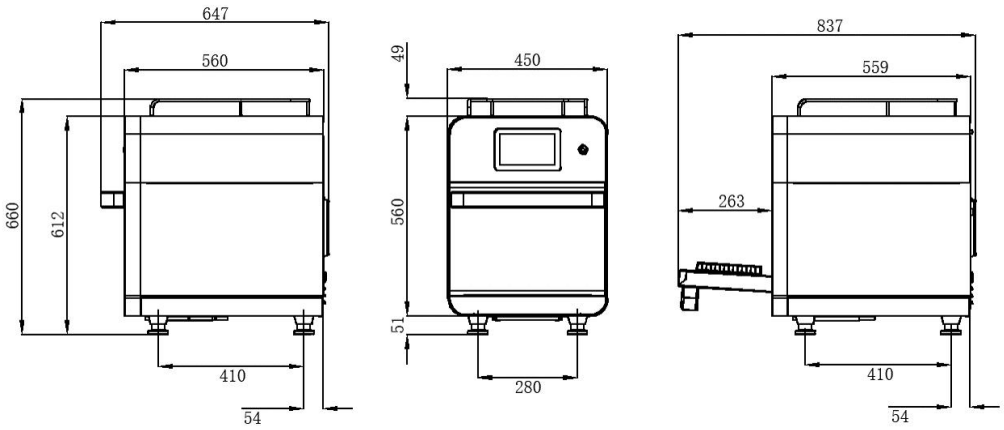

Standard Accessories

- 4125010000 OVEN SHOVEL HUR-18
- 4125020000 TEFLON MESH BASKET HUR-18
- 4125030000 ROUND TEFLON MESH Diam.23cm HUR-18
- 4125040000 ROUND PIZZA PAN HUR-18
- 4125050000 TEFLON COATED PLATE HUR-18
- 4129900048 TRAY WITH CERAMIC COATING HUR-18

Installation Instructions

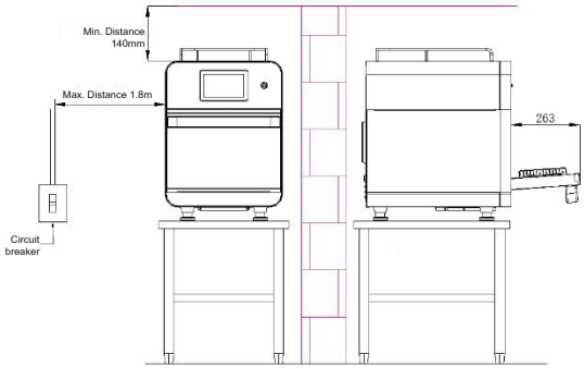

- Choose a location away from heat sources. Do not place the unit near grills, fryers, griddles or similar equipment.
- If there's a heat source nearby (such as a stove), a thermal insulation panel must be installed above the height of the oven.
- Place the oven on a non-slip, non-flammable, levelled and stable surface, capable of supporting the oven's total weight.
- Leave at least 140 mm of clearance in the upper part and 60 mm on the back in order to obtain a correct heat dissipation.
- Maintain enough space in front in order to open and close the oven's door without any obstacles.
- **Warning!**: An incorrect installation may void the warranty of the equipment.

ELECTRICAL DATA	
Voltage	208-240V · I
Frequency (4125000001)	50 Hz
Frequency (4125000002)	60 Hz
Power (kW)	3.5
Microwave Power (kW)	1.5
Hot Air Impingement (kW)	3

SHIPPING INFORMATION	
Cardboard box on pallet	
Dimensions (mm)	770x565x840
Weight (Kg)	84

SALVA INDUSTRIAL S.L.U.
GI-636 Km. 6 Polígono 107
E-20100 Lezo, Guipúzcoa
Tel: (+34) 943 449300

e-mail España: salva@salva.es
e-mail Export: sales@salva.es
www.salva.es

SALVA INDUSTRIAL S.L.U.
GI-636 Km. 6 Polígono 107
E-20100 Lezo, Guipúzcoa
Tel: (+34) 943 449300

e-mail España: salva@salva.es
e-mail Export: sales@salva.es
www.salva.es