

## EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 160kg

**ECM 227 AS OX** Medium gourmet cube 20g, Ø30mm x 34mm



Medium gourmet cube  
20g, 30mm dia x H 34mm




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 160kg daily production rate
- 70kg storage bin capacity
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- Hydrocarbons R290 refrigerant gas
- XSafe - Natural Sanitation System
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- Resistant stainless steel exterior
- Front access condenser air filter, removable and washable
- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes ice scoop, water and drain hose

### EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 160kg

#### ECM 227 AS OX

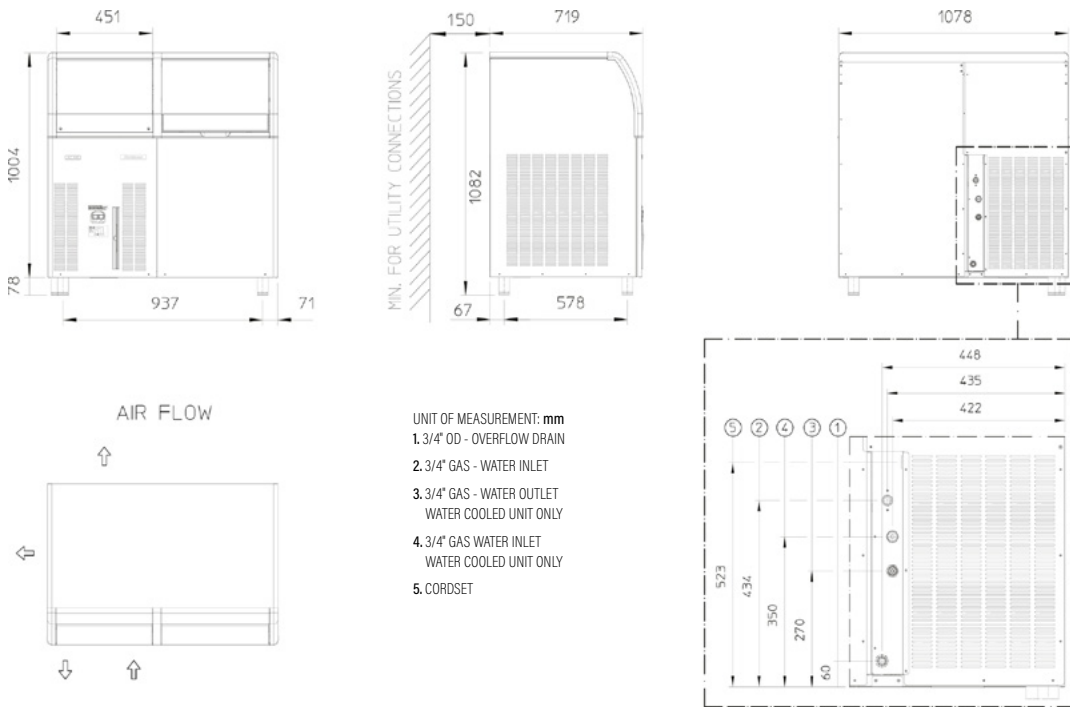

moffat.com.au

Australia  
Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9413 2400  
wasales@moffat.com.au

#### Ice production kg per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
165	160	130

#### Dimensions

Width: 1078mm  
Depth: 719mm  
Height: 1082mm (including legs)  
Nett weight: 98kg  
Packed weight: 112kg

#### Water consumption

Air cooled version: 21 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 1400W,  
10A cordset supplied  
No. Circuit wire: 3  
Compressor: 1400W\*  
Energy consumption: 28kW/24hr\*

\* Based on 32°C ambient / 21°C water temperature conditions

#### Refrigerant type

R290

#### Installation distance from wall

Rear 150mm  
Sides 150mm

Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R ¾"  
Cold water: 5-38°C  
Pressure: 100-500kPa  
Water outlet connection: Ø¾"

#### Operating requirements

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar / 14psi / 100kPa	5 bar / 70psi / 500kPa

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd  
AU.SM.2501