

SPH615HAU

Family	Dishwasher
Subfamily	Hoodtype
Type	Hoodtype dishwasher
Crockery	Crockery; Glasses; Cutlery; EN 600x400 trays; GN1/1 trays
Basket dimensions	600x500 e 500x500 mm
Control panel	Electronic
Rinse pump	HTR system
Wash pump	Standard
Power connection	400 V 3N~ / 16 A / 9,7 kW / 50 Hz



Distribution

Industries	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Butcher shops / Delicatessens; Food Industries; Catering; Care facilities ; Commercial food services; Grocery shops / Food retail
------------	--

Aesthetics

Serie	Easyline	Led color	Green
-------	----------	-----------	-------

Technical Features

Trays washing option	Yes	Max. inlet temperature	60°C
Trays number	7 x GN 1/1 (530 x 325 mm); 6 x EN 1/1 (600 x 400 mm)	Max water hardness	12°f - 7°dH
Water consumption per cycle	3,2 l	Water inlet	100-1000 kPa
Wash temperature (min-max)	58 °C	Detergent load	Yes, manual
Rinse temperature (min-max)	24 °C - 87 °C	Rinse load	Yes, manual
Minimum water consumption per cycle	3,2 l	Usable load height	470 mm
Water inlet	8°C	Product dimensions WxDxH	716x831x1520 mm

Programs

Programs	6 automatic programs; 1 fully programmable program; Self-cleaning programs
Program options	Extra rinse; Clean water cycle
Program table	Easyline hoodtype
Maximum basket/hour	51
Maximum dishes/hour	1122
Maximum glasses/hour	3360

Electrical Connection

Tank heating element power	2200 W	Default connection	9730 W
Boiler heating element power	9000 W	Electrical connection option	230 V~ / 16 A / 3,7 kW / 50 Hz; 230V~ / 26 A / 9,7 kW / 50 Hz ; 230 V~ / 30 A / 6,7 kW / 50 Hz
Wash pump power	700 W		

Interface

Display	8 digit	Cycle progress alert	Yes
On/Off button	Yes	End-cycle alert	Yes
Rinse aid missing alert	Yes	Manual diagnostic	Yes
Detergent missing alert	Yes		

Construction

Tank Construction	Deep drawn Double-skin hood	Filter	5-stages filter system
Tank material	Stainless steel AISI 304	Tank capacity	22 l
Back panel	St/steel	Boiler capacity	10 l
Upper washing system	One washing and one split rinse spray arms, stainless steel	Boiler type	Artmosferic boiler
Lower washing system	One washing and one split rinse spray arms, stainless steel	Rumorosità	Lpa 59,9 dBA
Tank filter	Stainless steel	Protection class	IPX4
Hood elevation system	Manual	Adjustable feet	Yes
		Drain max. height	1000 mm

Accessories Included

Dish basket	PB60D01	Water supply pipe	Yes - 2m
Cutlery basket	PHOOS03	Drain pipe	Yes - 2m
Flat basket	PB60G01		


Equipments

Drain pump	Yes	Option for auto daily switch on	Yes, default OFF
Peristaltic detergent dispenser	Yes, electronic control	Cycle counter	Yes
Peristaltic rinse-aid dispenser	Yes, electronic control	Break tank	Yes
Chemicals level probe	Yes, optional KITSONLIV	Partial renewal of water in the tank and built-in drain pump	Yes
Default chemicals dosing unit of measure	gr/lt	Water supply pipe diameter	16 mm
Rinse boiler Thermostop system	Yes - default	Drain supply pipe diameter	21,5 mm
Wash tank Thermostop system	Yes	Peristaltic detergent doser	Yes, manual
Wash pump soft start system	Yes	Peristaltic detergent doser	Yes, manual
Stand-by system	Yes		












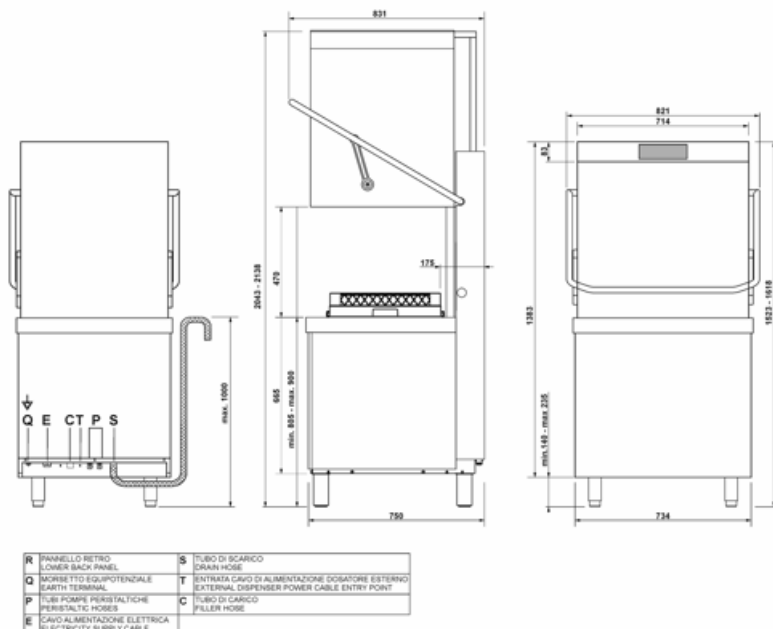






Logistic Information

Width packed product	770 mm
Depth packed product	900 mm
Height packed product	1700 mm

Packed product dimensions	1700x770x900 mm
Net weight	144,000 kg
Gross weight (kg)	159,000 kg




Compatible Accessories

	<p>KITSONLIV Probe level kit</p>		<p>PB50D01 Basket made of polypylene for 18 plates 500x500</p>
	<p>PB50G01 Universal basket in polypropylene 500x500</p>		<p>PB50G02 Universal basket in polypropylene 500x500</p>
	<p>PB50T01 Polypropylene basket for 8 trays GN 1/1 h 40 mm</p>		<p>PB60D01 Basket in polypropylene for 22 dishes 600x500</p>
	<p>PB60G01 Universal basket in polypropylene 600x500</p>		<p>PB60T02 Basket for trays GN1/1 600x500</p>
	<p>PHOOS01 Single basket in polypropylene for cutlery</p>		<p>PHOOS02 Basket in polypropylene for cutlery with 6 compartments</p>
	<p>PHOOS03 Basket in polypropylene with 6 compartment for cutlery for Capote</p>		<p>WB50D01 Wire basket for 18 dishes and trays 500x500</p>
	<p>WB50G01 Universal wire basket with flat bottom 500x500</p>		<p>WB50G02 Wire basket for glasses with inclined bottom 500x500</p>
	<p>WB50G04 Wire basket for glasses with inclined bottom 500x500</p>		<p>WB60D01 Wire basket for 24 dishes 600x500</p>
	<p>WB60D02 Wire basket for 24 dishes 600x500</p>		<p>WB60G01 Wire basket with flat bottom 600x500</p>

WB60T03

Wire basket for 5 trays 600x500



WH00S01

Wire insert for 12 small dishes



WT51200SHL

Entry table left side with sink and scraping hole, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



WT51200SHR

Entry table right side with sink and scraping hole, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



WT51200SL

Entry table left side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



WT51200SR

Entry table right side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



WT5700SR

Entry table right side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm



WTC5R

Right side closure kit for Hoodtype



WTX51200

Universal entry/exit table for either side, with lower shelf, dim. (WxDxH) 1200x560x821, 5 mm



WTX51200L

Exit left side table, with splashback (100 mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



WTX51200R

Exit right side table, with splashback (100 mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



WTX5700

Universal entry/exit table for either side, with lower shelf. dim. (WxDxH) 700x560x821, 5 mm.



WTX5700L

Exit table left side, with back splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm



WTX5700R

Exit table right side, with back splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm



WTX6700F

Universal table for either side, with front coupling and lower shelf, dim. (WxDxH) 705x660x821, 5 mm



Symbols glossary



Benefit (TT)

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Double-skin hood

Thermal and acoustic insulation guaranteed

The double-skin design of the hood is engineered to optimise energy efficiency by minimising heat dispersion and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.

Euronorm

Compatibility with EN 600x400 mm trays

The 500x500 traywashers offer great versatility, with the ability to wash up to 6 Euronorm 600x400 mm trays. These features make the products extremely useful for a wide range of activities, such as pizzerias, bakeries, bistros, catering, restaurants, and cafés.