


Glass Door Display

GDM-45-HC-LD

 Upright Retail Merchandiser Refrigerator, 2 Full Glass Slide Doors



Dimensions	
External Width (mm)	1299
External Depth (mm)	753
External Height (mm)	1998
Exclusions	Depth does not include 10 mm for door handle or 13 mm for rear access panel.
Net Volume (Litres)	792
Gross Volume (Litres)	1274
Display Area (m ²)	1.32
Supplied Shelves	8
Shelf Size (L x D mm)	583 x 523
Internal Net Height (mm)	1300
Unpackaged Weight (kg)	185
Packaged Weight (kg)	196
Packaged Dimensions (W x D x H mm)	1366 x 829 x 2134
Supplied with	Levelling Screws. Optional castors sold separately.

Build	
Door Description	2 Full Glass Slide Doors
Exterior Construction	Stainless Steel/Aluminium front, Aluminium sides and rear (Black or White Powder Coat option)
Interior Construction	White coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Rear
Clearance Required	26 mm rear, zero sides
Cord Length (Meters)	2.74
Internal Lighting	LED
Standard w/ Locks	Not Standard. Options available.

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	2.2
Watts	506
Temperature Class	M1
Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Test Standard	EN 23953
EEC	B
Energy Efficiency Index	16.2
Defrost Type	Auto
Energy Consumption (kWh/24h)	4.33
Energy Consumption (kWh/Annum)	1581



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
[+41 61 563 07 05](tel:+61615630705)
[+61 2 9619 9999](tel:+61296199999)


TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



Glass Door Display

GDM-45-HC-LD

Upright Retail Merchandiser Refrigerator, 2 Full Glass Slide Doors

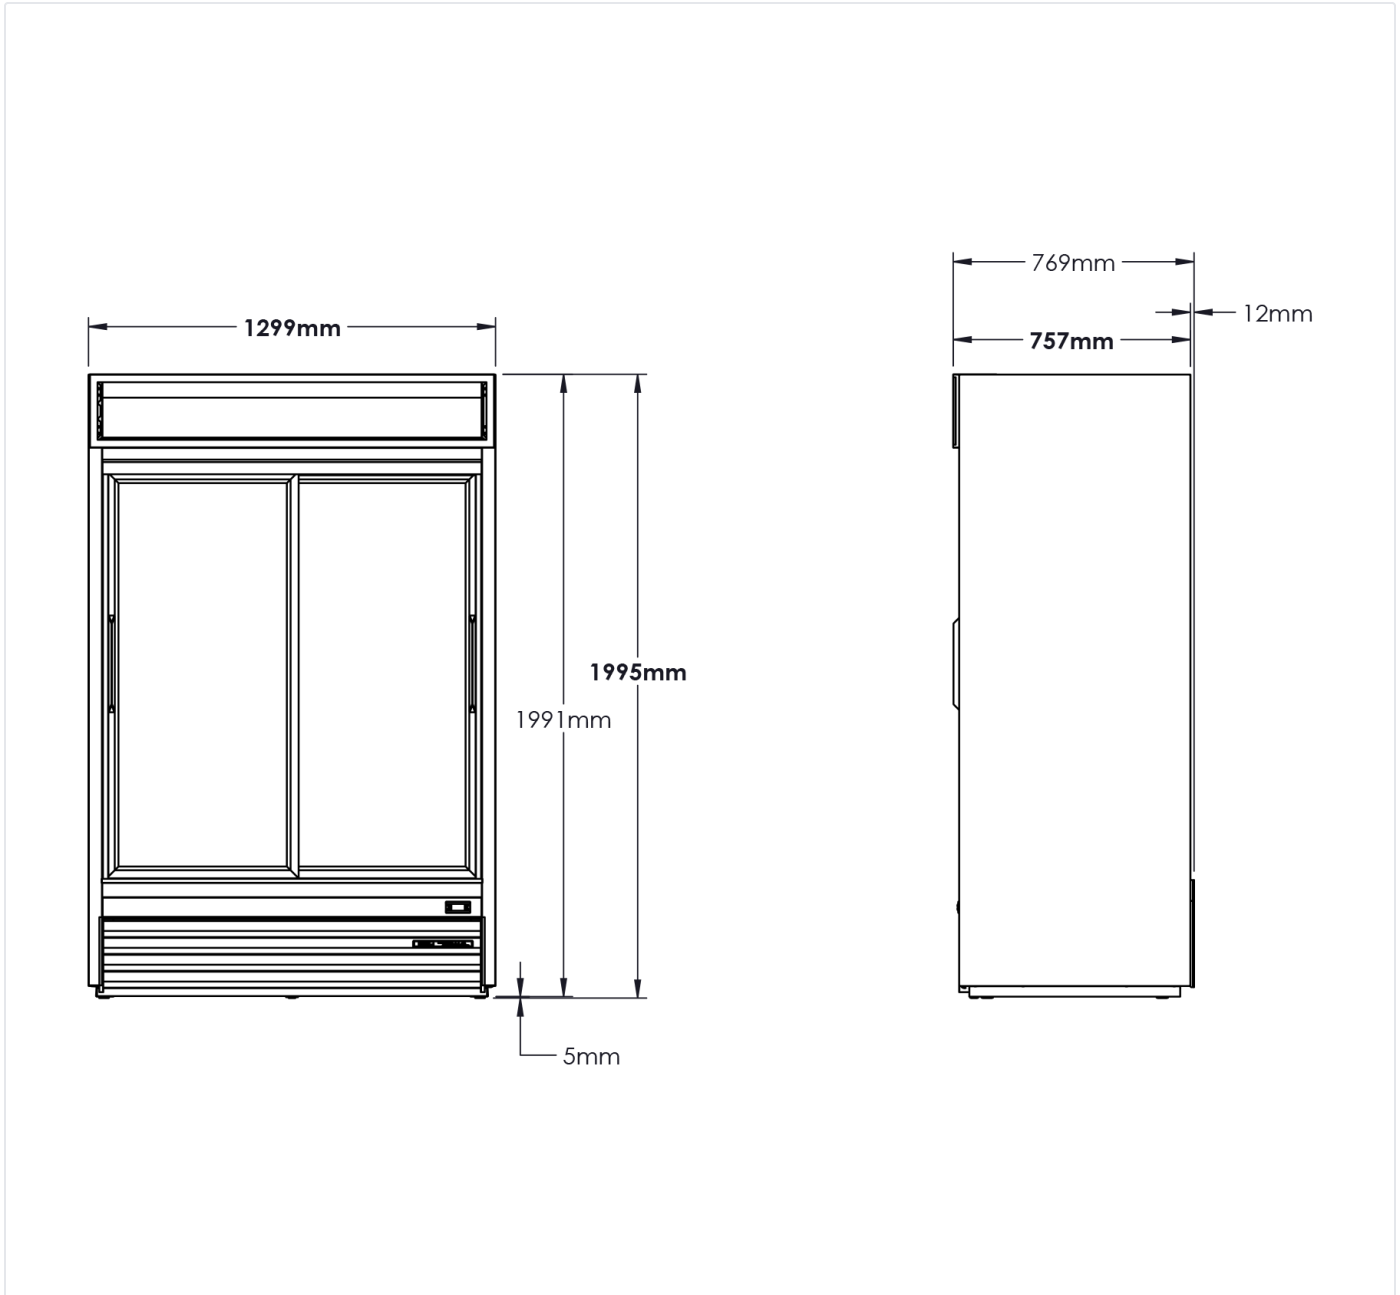

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

