



Technical Data:

Dimensions	600 x 600 x 850/900 mm
Tank Capacity	28 litres
Basket Dimensions	2 x (255 x 285 x 135 mm)
Production Capacity	Up to 68 kg/h
Voltage	415 V
Heating Power	22 kW
Current	40 A
Temperature range	95° C - 190° C
Net Weight	93 kg
Protection Index	IPX5
Power Cable	2.5 m (supplied without plug)

Product Description:

- Automatic basket lifting system (up & down) with end-of-cycle lift.
- Pump system with automatic oil filtration (metal filter + microfilter) to extend oil life.
- Electronic temperature control ($\pm 1^{\circ}\text{C}$) with 2 x 6 configurable programmes.
- FrySmart Technology™ for oil-absence detection and enhanced safety.
- Operating modes: ECO (energy saving), MELT (fat melting), CLEAN (hot cleaning).
- Energy optimisation interface, smart safety key, overheating protection, removable electrical box.
- High insulation and cold-zone tank to reduce energy loss and oil degradation.
- Swiss-made stainless steel, rounded corners, swivel heating element, adjustable height (850–900 mm).

Included Accessories:

- 2 baskets
- 2 containers with a metal filter on top
- Additional microfilter


Optional Accessories:

- Fish grid, Fine meshed Basket and a Draining rack



Front View

Top View

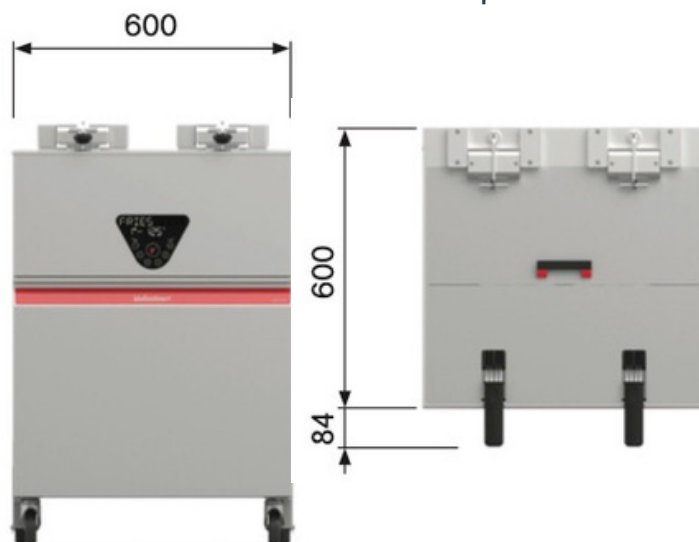

Side View

