

## WD-4S-Basic ERGONOMIC UNDERCOUNTER GLASSWASHER

### STANDARD FEATURES:

- High quality Swedish design
- Washes up to 50 baskets per hour
- 3 cycles – 72 /144 / 252 seconds (adjustable)
- 2.4 litres per cycle water consumption
- 20 litres deep draw wash tank
- Fits standard 500mm basket
- Tall 330mm useable wash height
- Fast recovery on cold water
- Silent operation, only 61dB
- Smart touch display - simplifies operation
- One touch water change – drains, self-cleans & refills in 10 minutes
- Self-cleaning cycle
- Hygienic door opening
- Quick drain wash arms - dishes start drying sooner
- Break tank with rinse booster pump
- Drain pump with auto drain
- Detergent pump
- Rinse aid pump
- Easy to service from the front
- Polish free compatible with BWT Reverse Osmosis water filters.

### TECHNICAL INFORMATION:

#### Dimensions

Width: 598mm  
Depth: 598mm  
Height: 820mm

#### Water

Hot water temperature: 55-65°C  
Cold Water, when connected to RO  
Pressure: 100-350kPa  
Flow: 8 litres per min  
Water quality:  
70-125ppm  
pH 6.5-8.5  
Chloride - max. 60mg/L  
Free Chloride – max. 0.2mg/L  
Sulphate – max.150mg/L  
Iron – max. 0.1mg/L  
Monochloramine – max.0.2mg/L

#### Waste


Connection: 22mm dia. Direct

#### Electrical

3P+N+E 400-415V 50/60Hz  
7.65kW 16A Cordset supplied

Upgrades and options are available, please contact Moffat for more details.

Refer operator manual for complete installation instructions.

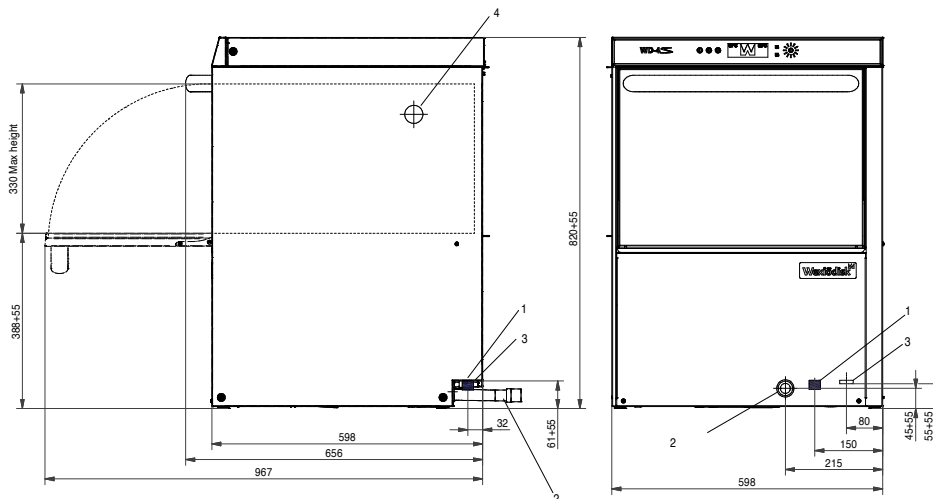

- 1 Water connection, ext. thread R3/4"
- 2 Drain connection, flexible hose Ø22mm length 2m
- 3 Electrical connection cable length 2m
- 4 Non- return valve / Vacuum valve



Australia  
moffat.com.au  
Moffat Pty Limited  
740 Springvale Road  
Mulgrave  
Victoria 3170  
Australia  
Telephone +613-9518 3888  
Facsimile +613-9518 3833  
vsales@moffat.com.au

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.